


# Select The Right Terminal




## BUTTED SEAM BARREL NON-INSULATED

Electro-tin plated copper terminal  
Can be crimped or soldered.



## BUTTED SEAM BARREL FLARED VINYL INSULATION

Electro-tin plated copper terminal with flared vinyl insulation. Flare overlaps wire insulation providing support for terminated wire.  
Operating Temp -40°F (-40°C) to 167°F (75°C)

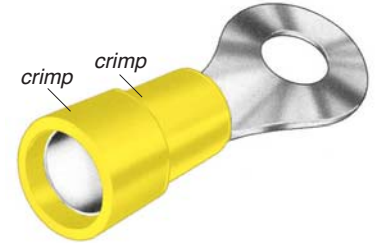

## BUTTED SEAM BARREL NYLON INSULATION BRASS SUPPORT SLEEVE

Electro-tin plated copper terminal with brass support sleeve. Easy insertion of stripped wire.  
Crimp on terminal barrel and over brass sleeve.  
Operating Temp -40°F (-40°C) to 220°F (105°C)

# Rings

Most Commonly Used Style of Terminal - Not For Use Where Frequent Removal Is Necessary  
Ring Terminals Easily Stack On Stud For Multiple Connections

## VINYL INSULATED

*Heat Shrink Terminals Page 10*



*Solderless Terminal Kits  
(Page 3)*



Stud Size	Red 22-16 AWG				Blue 16-14 AWG				Yellow 12-10 AWG			
	Part #	Qty	Part #	Qty	Part #	Qty	Part #	Qty	Part #	Qty	Part #	Qty
#6	1703A	1000	—	—	1803A	1000	—	—	1903A	500	—	—
#6	1703C	100	1703PT	100	1803C	100	1803PT	100	1903G	100	1903PT	50
#6	1703D	14	1703KT	20	1803D	14	1803KT	20	1903C	50	1903KT	13
#6	1703M	5	1703QT	5	1803M	5	1803QT	5	1903M	3	1903QT	3
#8	1704A	1000	—	—	1804A	1000	—	—	1904A	500	—	—
#8	1704C	100	1704PT	100	1804C	100	1804PT	100	1904G	100	—	—
#8	1704D	14	1704KT	20	1804D	14	1804KT	20	1904C	50	1904PT	50
#8	1704M	5	1704QT	5	1804M	5	1804QT	5	1904D	9	1904KT	14
#8	—	—	—	—	—	—	—	—	1904M	3	1904QT	3
#10	1705A	1000	—	—	1805A	1000	—	—	1905A	500	—	—
#10	1705C	100	1705PT	100	1805C	100	1805PT	100	1905G	100	—	—
#10	1705H	20	1705KT	20	1805H	20	1805KT	20	1905C	50	1905PT	50
#10	1705D	14	—	—	1805D	14	—	—	1905H	14	1905KT	14
#10	1705M	5	1705QT	5	1805M	5	1805QT	5	1905D	9	—	—
#10	—	—	—	—	—	—	—	—	1905M	3	1905QT	3
1/4"	1706A	1000	—	—	1806A	1000	—	—	1906A	500	—	—
1/4"	1706C	50	1706PT	50	1806G	100	—	—	1906G	100	—	—
1/4"	1706D	9	1706KT	14	1806C	50	1806PT	50	1906C	25	1906PT	25
1/4"	1706M	3	1706QT	3	1806H	14	1806KT	14	1906H	12	1906KT	12
1/4"	—	—	—	—	1806D	9	—	—	1906D	7	—	—
1/4"	—	—	—	—	1806M	3	1806QT	3	1906M	3	1906QT	3
5/16"	1708A	1000	—	—	1808A	1000	—	—	1908A	500	—	—
5/16"	1708C	50	1708PT	50	1808G	100	—	—	1908G	100	—	—
5/16"	1708D	9	1708KT	12	1808C	50	1808PT	50	1908C	25	1908PT	25
5/16"	1708M	3	1708QT	3	1808D	9	1808KT	12	1908D	7	1908KT	11
5/16"	—	—	—	—	1808M	3	1808QT	3	1908M	2	1908QT	2
3/8"	1709A	1000	—	—	1809A	1000	—	—	1909A	500	—	—
3/8"	1709C	50	1709PT	50	1809G	100	—	—	1909G	100	—	—
3/8"	1709D	8	1709KT	10	1809C	50	1809PT	50	1909C	25	1909PT	25
3/8"	1709M	2	1709QT	2	1809D	8	1809KT	10	1909H	10	1909KT	10
3/8"	—	—	—	—	1809M	2	1809QT	2	1909D	6	—	—
3/8"	—	—	—	—	—	—	—	—	1909M	2	1909QT	2
1/2"	—	—	—	—	—	—	—	—	1913A	500	—	—
1/2"	—	—	—	—	—	—	—	—	1913G	100	—	—
1/2"	—	—	—	—	—	—	—	—	1913C	25	1913PT	25
1/2"	—	—	—	—	—	—	—	—	1913D	3	1913KT	5
1/2"	—	—	—	—	—	—	—	—	1913M	1	1913QT	1

## NON-INSULATED



#6	2303A	1000	2303C	100	2403A	1000	2403C	100	2503A	500	2503C	50
#8	2304A	1000	2304C	100	2404A	1000	2404C	100	2504A	500	2504C	50
#10	2305A	1000	2305C	100	2405A	1000	2405C	100	2505A	500	2505C	50
1/4"	2306A	1000	2306C	100	2406A	1000	2406C	100	2506A	500	2506C	50
5/16"	2308A	1000	2308C	100	2408A	1000	2408C	100	2508A	500	2508C	50
3/8"	2309A	1000	2309C	100	2409A	1000	2409C	100	2509A	500	2509C	50
1/2"	—	—	—	—	—	—	—	—	2513A	500	2513C	50

## NYLON INSULATED WITH METAL SLEEVE



#6	2903A	500	2903C	25	3003A	500	3003C	25	3103A	250	3103C	20
#8	2904A	500	2904C	25	3004A	500	3004G	100	3104A	250	3104G	100
#8	—	—	—	—	—	—	3004C	25	—	—	3104C	20
#10	2905A	500	2905C	25	3005A	500	3005G	100	3105A	250	3105G	100
#10	—	—	—	—	—	—	3005C	25	—	—	3105C	20
1/4"	2906A	500	2906C	20	3006A	500	3006G	100	3106A	250	3106G	100
1/4"	—	—	—	—	—	—	3006C	20	—	—	3106C	18
5/16"	2908A	500	2908C	20	3008A	500	3008G	100	3108A	250	3108G	100
5/16"	—	—	—	—	—	—	3008C	20	—	—	3108C	18
3/8"	2909A	500	2909C	20	3009A	500	3009G	100	3109A	250	3109G	100
3/8"	—	—	—	—	—	—	3009C	20	—	—	3109C	18

All Items with QT, KT, ET, GT or PT Suffix are Clam Shell Program Items.